

Glasswasher LB95H

SERIES TRENDY



CONSTRUCTION FEATURES

Structure completely in 18/10 stainless steel AISI 304.
Maximum clean ability inside the tank.
Washing/rinsing arms and boiler completely in 18/10 stainless steel.
Double skin balance door.
Rinse aid vacuum-dispenser.
Bridge-handle in stainless steel easy to be seized.
Pump filter in 18/10 stainless steel.

ELECTRIC ELEMENTS

Use friendly extractable control panel.
Heating element for tank and boiler in Incaloy 800.

- Plastic basket 35x35 cm
- Max washable object 26 cm



LASA srl
via Toniolo, 6 - 31028 Vazzola (TV) Italy
tel. +39 0438 740440 fax +39 0438 740431
lasa@lstgroup.com - www.lstgroup.com/lasa



Glasswasher LB95H




Technical Details



DESCRIPTION	LB95H	LB95H-1	LB95H-2	LB95H-3	LB95H-4	LB95H-K	LB95H-2K	LB95H-3K
Cycles duration	adjustable from 1 to 6 min							
Tank capacity	16 litre							
Boiler capacity	3 litre							
Washing water temperature	55°C							
Rinsing water temperature	85°C							
Rinse cycle	15"							
Water consumption per cycle	2 - 3 litre							
Power supply tension 50 Hz	230 V -							
Boiler power	2,6 Kw							
Tank power	1,8 Kw							
Washing pump power	0,11 Kw							
Water supply pressure	between 2 and 4 bar							
Max temperature of incoming water	55°C							


- Plastic basket 35x35 cm
- Max washable object 26 cm

OPTIONAL	LB95H	LB95H-1	LB95H-2	LB95H-3	LB95H-4	LB95H-K	LB95H-2K	LB95H-3K
Rinse aid dispenser	•	•	•	•	•	•	•	•
Rinse aid container		•	•	•			•	•
Water softener						•	•	•
Drain pump				•				•
Soap dispenser				on request				
Rinsing with cold water			•		•		•	•
Anti-ebb device				on request				

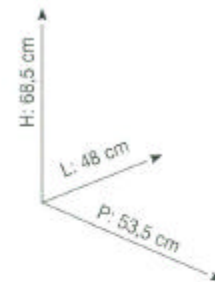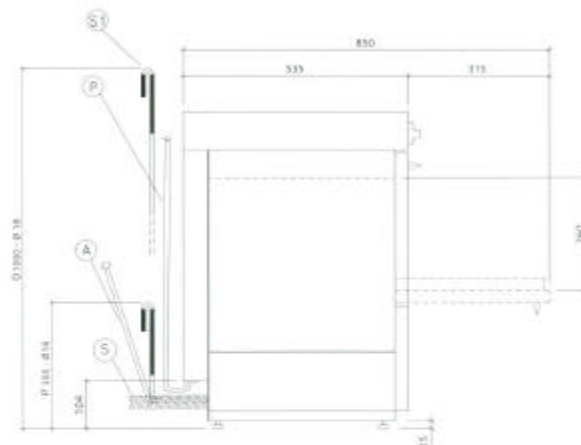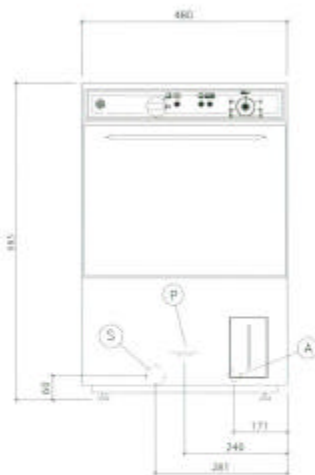

Legend:

- A: Water supply pipe (ø 3/4" G)
- S: Gravity drain (ø 25 mm)
- P: Power supply hose



LASA srl
 via Toniolo, 6 - 31028 Vazzola (TV) Italy
 tel. +39 0438 740440 fax +39 0438 740431
 lasa@lstgroup.com - www.lstgroup.com/lasa

